



**1.new yarn hooking mechanism:**

high-precision system solve the trouble of old machine,such as skipping,loud-noise,unstable etc.

**2.exterior design:**

multi-function cover is beautifu and can protect the machine

**3.aduanced transmission mechanism:**

through direct transmission system,improve the function

**4.缝盘电控伺服电机 The CVT Servo Motor System**

配备微电脑伺服电机,具有节能高速美观安全优点,传统缝盘机每分钟360转-500转,而配有伺服电机可实现无极变速,达到所需的任意速度,0-1200转工作更加稳定。

The cvt servo motor with machine can control the speed freely and save power, the worker can adjust according their needs

**The advantages**

1. The traditional dial linking machine is multi-link system, easy to be loosen, cause the cloth uneven.Our specialty can solve the above trouble
2. The running speed of the traditional machine is about 460\_470RPM the actual determined speed of ours is 800-1200RPM.
3. Several humanized patent increase efficiency.
4. Adopt imported special tooth-form belf from GERMANY to transmif

Number of Gauges:  
2G.3G.4G.5G.6G.7G.8G.10G.12G.14G.16G.18G.20G.22G.24G


**Specification**

Diameter of Dial	14"
Number of Gauges	2~24 Gauges
Power Required	1/8 HP
Pulley Revolution	300—1000 R.P.M
Weight	30 kg
Packing Measurement	600mmX570mmX255mm




**SWEATER LINKING MACHINE  
MEMETECH.IO**

# Parts group

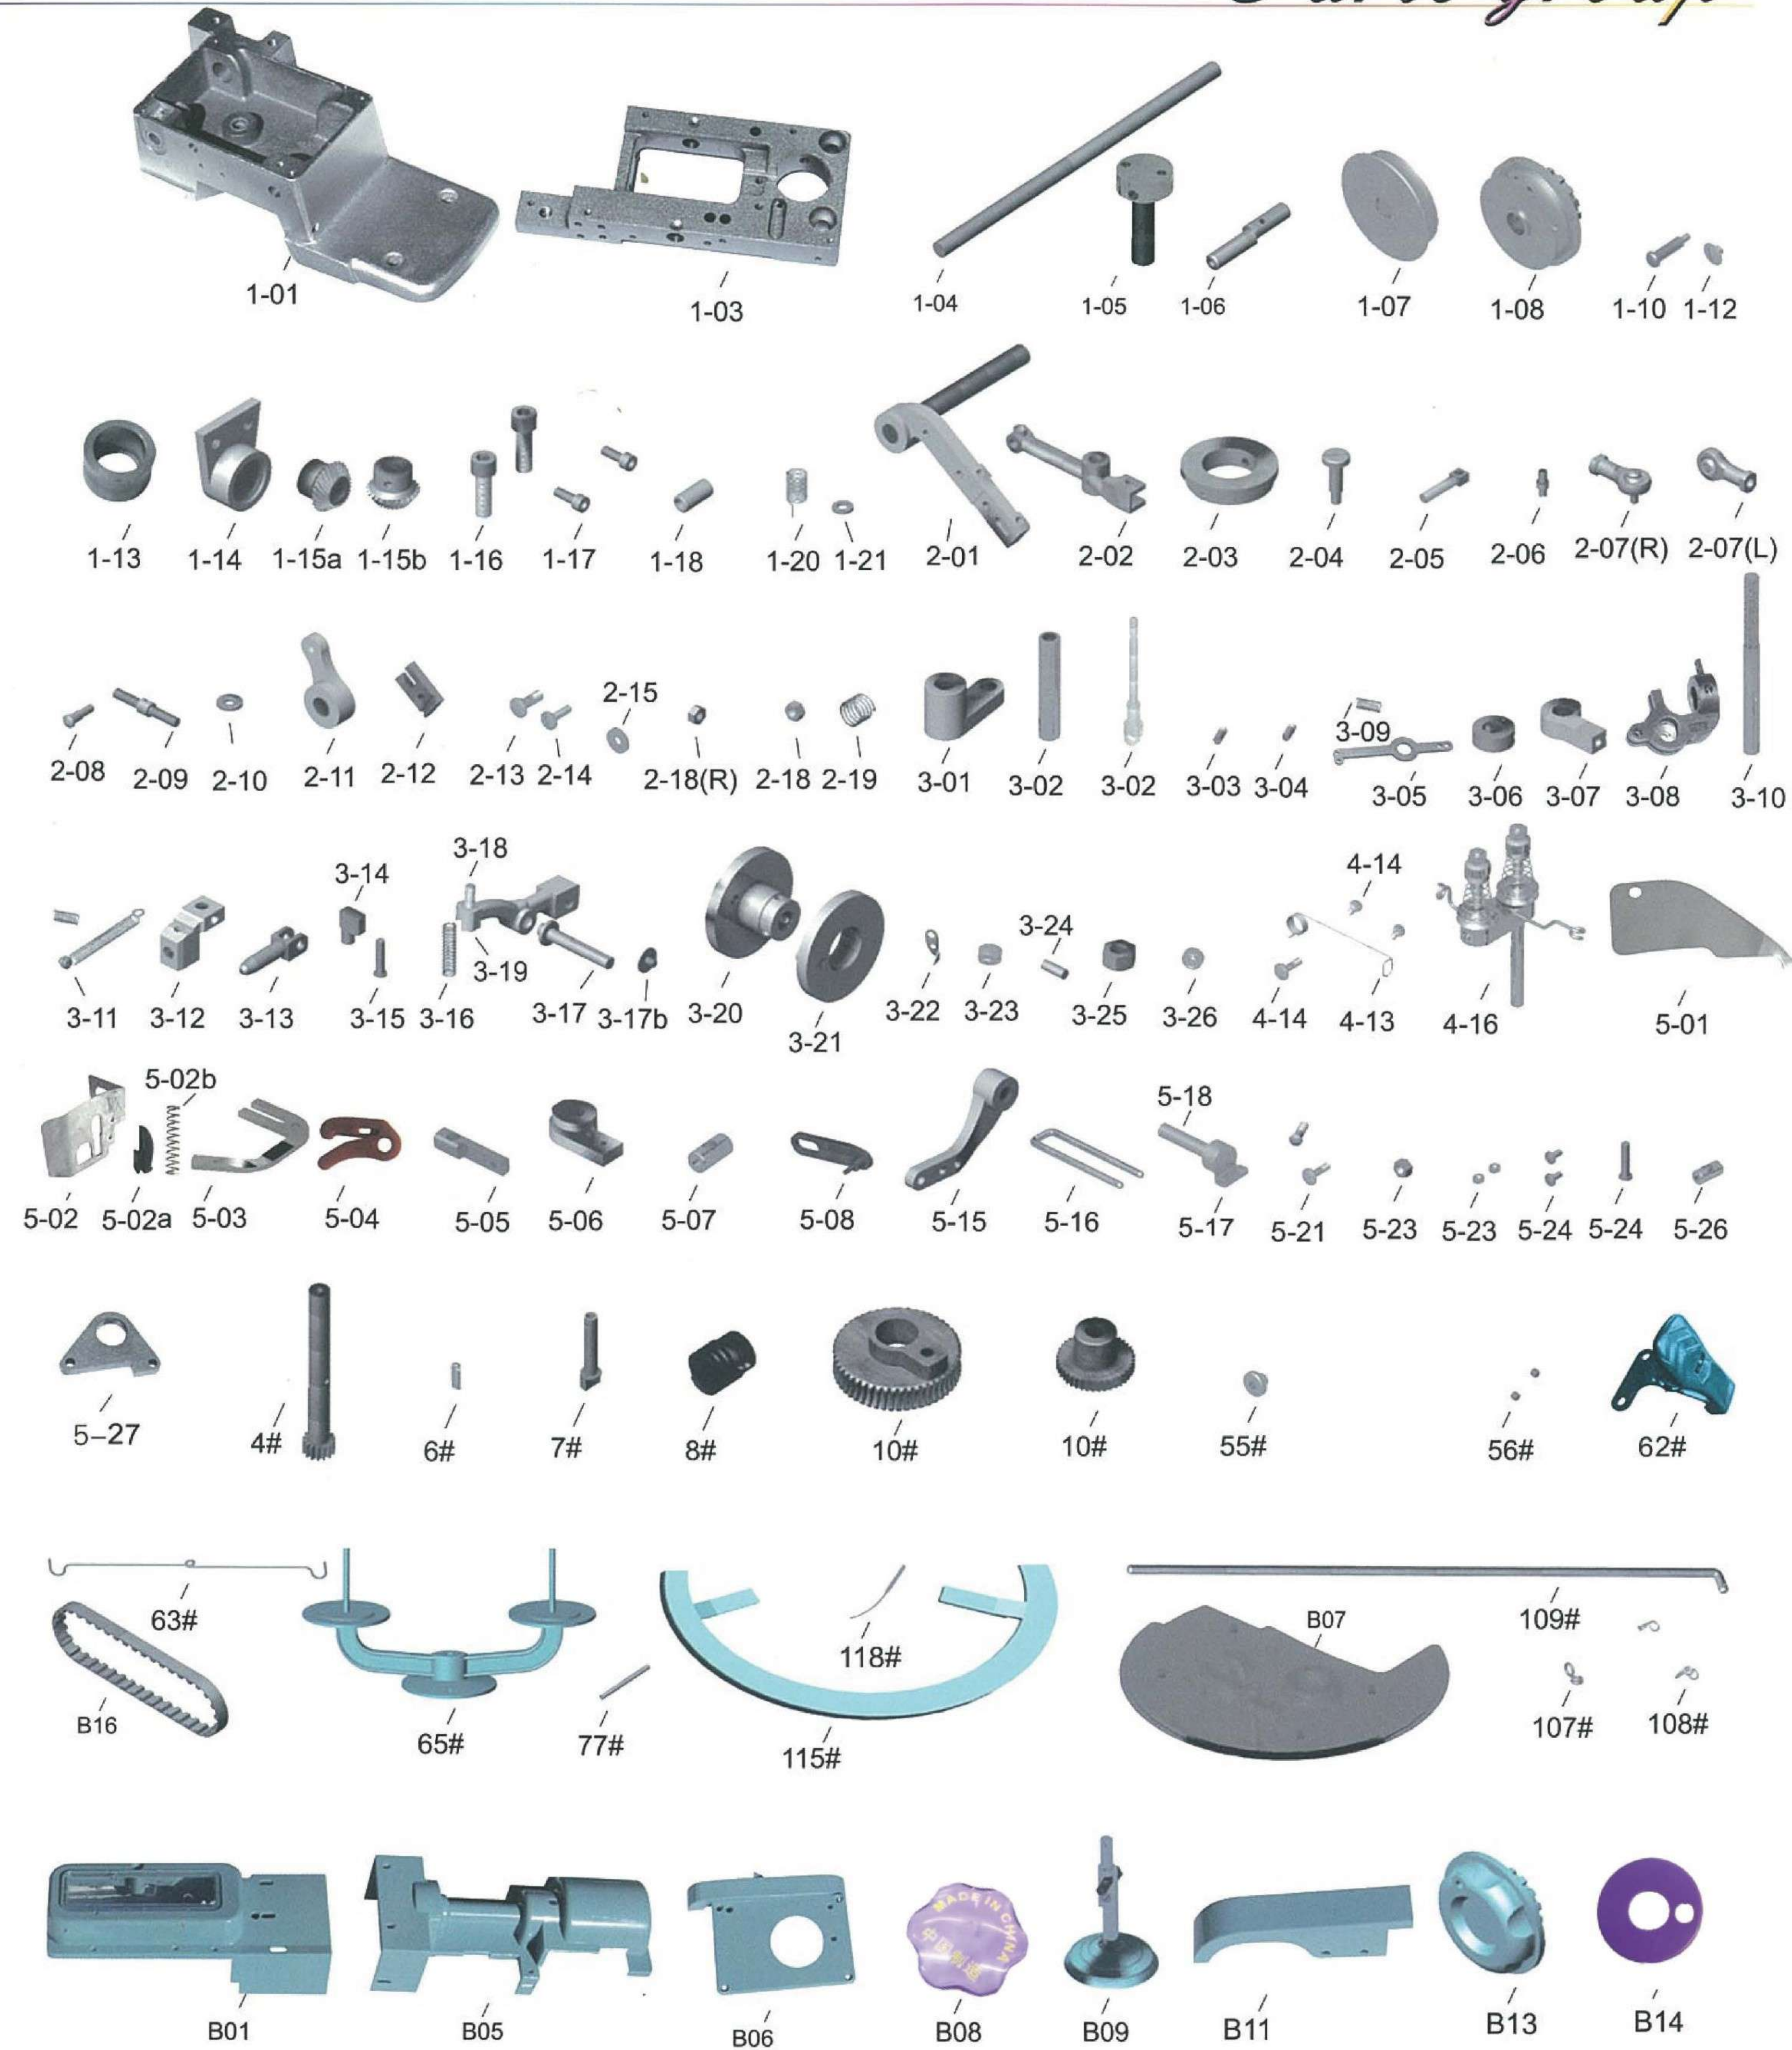

- |   |   |   |                       |                                 |
|---|---|---|-----------------------|---------------------------------|
| A. M6*8mm Philips screw<br>M6*8mm 十字开口螺丝(小护盖螺丝) | E. M5*12 internal hexagonal screw<br>M5*12mm内六角螺丝     | I. M6*25 external hexagonal screw<br>M6*25mm外六角螺丝 | M. R2 bearing<br>R2轴承 | Q. 5mm washer<br>5厘华司           |
| B. M5*12mm Philips screw<br>M5*12mm 十字开口螺丝      | F. M5*12 external hexagonal screw<br>M5*12mm外六角螺丝     | J. 1/4-28 nut<br>1/4-28螺母                         | N. R3 bearing<br>R3轴承 | R. 6mm washer<br>6厘华司           |
| C. M4*10mm Philips screw<br>M4*10mm 十字开口螺丝      | G. M5*20 internal hexagonal screw<br>M5*20mm内六角螺丝     | K. M6*5mm nut<br>M6*5mm螺母                         | O. R4 bearing<br>R4轴承 | S. M5 spring penetron<br>M5弹簧介子 |
| D. M3*5mm Philips screw<br>M3*5mm 十字开口螺丝        | H. M10*30mm external hexagonal screw<br>M10*30mm外六角螺丝 | L. One way bearing<br>单向轴承                        | P. R8 bearing<br>R8轴承 | T. M6 spring penetron<br>M6弹簧介子 |

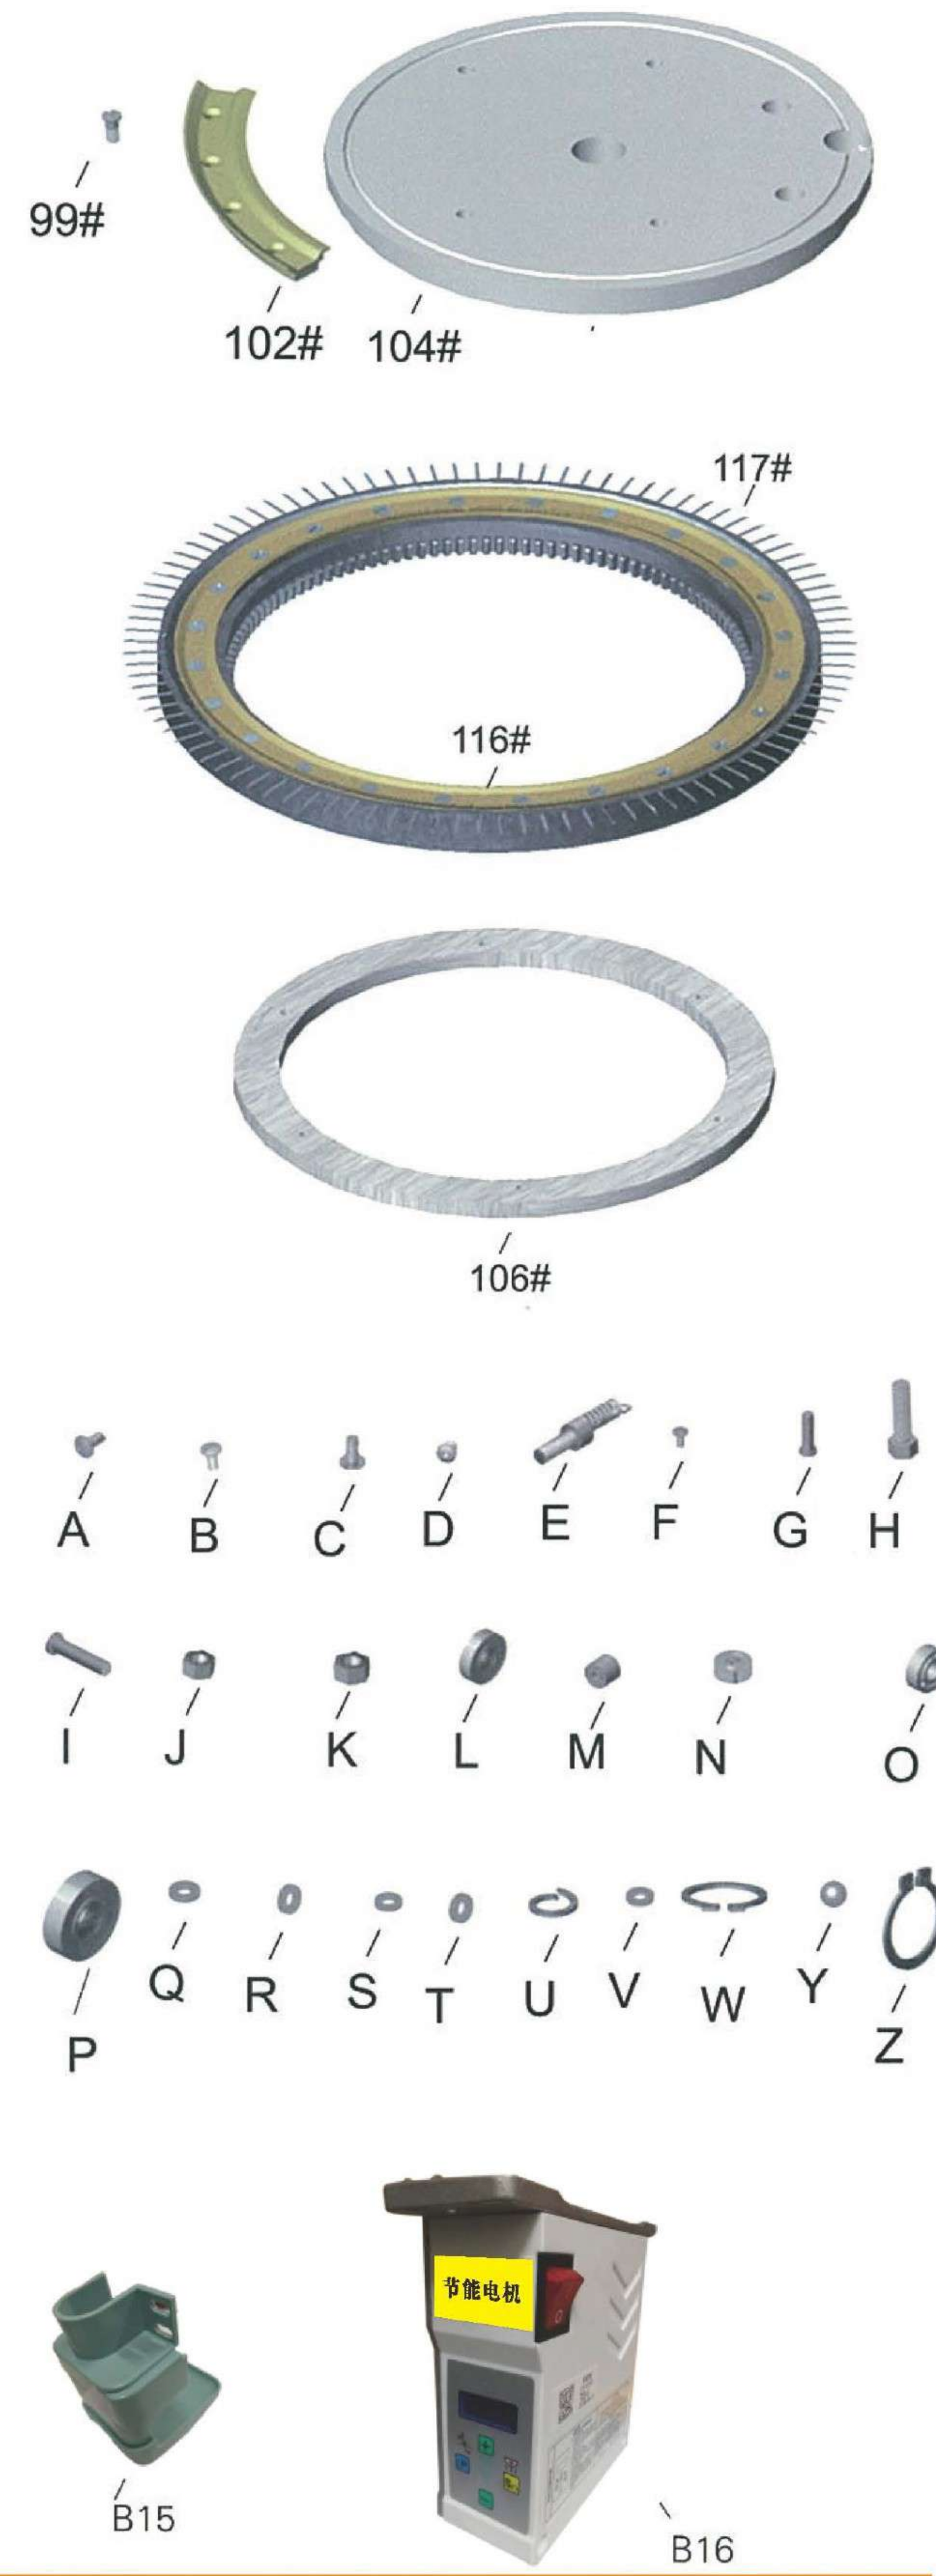

- |   |   |
|---|---|
| M10 spring penetron<br>M10弹簧介子                              | U. ΦX7mm strll ball<br>Φ7mm 钢球          |
| Washer (ΦX12mm, 5.2mm, Th2mm)<br>垫片 (外径Φ12mm, Φ5.2mm, 厚2mm) | V. ΦX31mm internal circlip<br>Φ31mm 内卡簧 |
| ΦX11mm external circlip<br>Φ11mm外卡簧                         |   |

- |  |   |
|--|---|
| 1-01. Machine table                                    | 5-01. Big cover sheet 大遮片                                 |
| 1-03. Rack   | 5-02. Small cover sheet 小遮片                               |
| 1-04. Main axis  | 5-02a. Wire connector 连线器                                 |
| 1-05. Short axis                                       | 5-02b. Connector spring 连线器弹簧                             |
| 1-06. Eccentric shaft P                                | 5-03. Big block sheet 大挡片                                 |
| 1-07. Driving wheel (A)                                | 5-04. Medium block sheet 妙用刀片                             |
| 1-08. Driving wheel (B)                                | 5-05. Small work covering sheet seat<br>小遮衣片座             |
| 1-10. Belt pulley screw                                | 5-06. Block sheet seat 挡片座                                |
| 1-12. Eccentric shaft screw                            | 5-07. Needle fixing seat 定针座                              |
| 1-13. Bearing bracket(A)                               | 5-08. Needle fixing shaft sheet (A,B)<br>定针轴片(A), 定针轴片(B) |
| 1-14. Bearing bracket(B)                               | 5-15. Pedal switch 脚踏开关                                   |
| 1-15. Bevel gear(A,B)                                  | 5-16. Belt fork 皮带叉                                       |
| 1-16. M10*30mm hexagonal screw<br>M10*30mm             | 5-17. Clutch 离合器  |
| 1-17. M6*16mm hexagonal screw<br>M6*16mm               | 5-21. M5*15.5mm Philips screw<br>M5*15.5mm十字开口螺丝          |
| 1-18. Sliding sleeve                                   | 5-23. M5 nut M5螺母   |
| 1-19. Eccentric sleeve                                 | 5-24. M6*12 hexagonal screw<br>M6*12外六角螺丝                 |
| 1-20. Blocking spring                                  | 5-26. Double aperture shate 双孔轴                           |
| 1-21. Large distance piece                             | 5-27. Axle holder 轴座                                      |
| 2-01. Needle arm                                       | 4#. Central teeth 中心齿                                     |
| 2-02. Needle swing lever                               | 6#. Patented M5 screw<br>专利品(M5螺丝)                        |
| 2-03. Eccentric wheel                                  | 7#. Block teeth 挡齿  |
| 2-04. Lever fixed screw                                | 8#. Ome teeth 欧姆牙   |
| 2-05. Lever screw                                      | 10#. Ome gear (Internal and external)<br>欧姆齿轮(内,外)        |
| 2-06. Bearing shaft                                    | 34#. Spring buckle 弹簧扣                                    |
| 2-07. Universal bearing (L R threads)                  | 55#. M5 hexagonal screw<br>M6内六角螺丝                        |
| 2-08. Universal screw                                  | 62#. Pedal 脚踏   |
| 2-09. Connecting link screw                            | 63#. Hang bar 天线  |
| 2-10. Washer   | 65#. Thread pedestal 线座                                   |
| 2-11. Shifter block                                    | 77#. Spring block 弹簧挡                                     |
| 2-12. Needle seat                                      | 99#. Needle pressue plate screw<br>压针片螺丝                  |
| 2-13. Eccentric screw                                  | 102#. Needle pressure plate 压针片                           |
| 2-14. Needle holding plate screw                       | 104#. Middle disk 中盘                                      |
| 2-15. Distance piece                                   | 106#. Bottom ring 底盘                                      |
| 2-18. Right/left threaded nut (M6)                     | 107#. Upper thread ear 上线耳                                |
| 2-19. Needle swing spring                              | 108#. Lower thread  |
| 2-20. Bearing shaft                                    | 109#. Thread bar 线杆                                       |
| 3-01. Thread picker                                    | 110#. Pedal bar 脚踏杆                                       |
| 3-02. Thread picker                                    | 115#. Needle cover 护针盖                                    |
| 3-03. Bearing screw                                    | 116#. Needle disc 针盘                                      |
| 3-04. Beating plate screw                              | 117#. Small Needle 小针                                     |
| 3-05. Beating plate                                    | 118#. Big Needle 大针                                       |
| 3-06. Sliding seat fixed sleeve                        | B01. Big cover 大盖   |
| 3-07. Swing piece                                      | B03-01. Small lid screw 小盖螺丝                              |
| 3-08. Beating plate fixed seat                         | B05. Chassiiis 底盘   |
| 3-09. Beating plate press spring                       | B06. Machine table cover 车台盖                              |
| 3-10. Fixing shaft                                     | B07. Middle disc cover 中盘盖组                               |
| 3-11. Extension spring                                 | B08. Hand wheel 手轮  |
| 3-12. Sliding seat with oil                            | B09. Poking wheel 拨衣轮                                     |
| 3-13. Crown bar  | B10. Roller 滚轮  |
| 3-13a. Fixed screw                                     | B11. Upper belf cover 皮带上罩                                |
| 3-14. Positioner                                       | B12. Lower belf cover 皮带上罩                                |
| 3-15. M5*23.5mm Philips screw<br>M5*23.5mm             | B13. Belf hand wheel 皮带手轮                                 |
| 3-16. Sliding sleeve spring                            | B14. Rubber sheet 胶片                                      |
| 3-17. Fixed lock                                       | B15. Small protection lid 小护盖                             |
| 3-17b. Screw   | B16. Electronic control of sewing disc                    |
| 3-18. Adjustment screw                                 |   |
| 3-19. Thread picker lever                              |   |
| 3-20. Left cam   |   |
| 3-21. Right cam  |   |
| 3-22. Triangle   |   |
| 3-23. Adjustment nut                                   |   |
| 3-24. Bearing shaft                                    |   |
| 3-25. M10*8mm nut M10*8mm                              |   |
| 3-26. Bearing  |   |
| 4-13. Thread picker spring                             |   |
| 4-14. M5*6.5mm Philips screw<br>M5*6.5mm Philips screw |   |
| 4-16. Thread bracket                                   |   |